


# ML390/ML391 Turbo Dot Matrix Printer

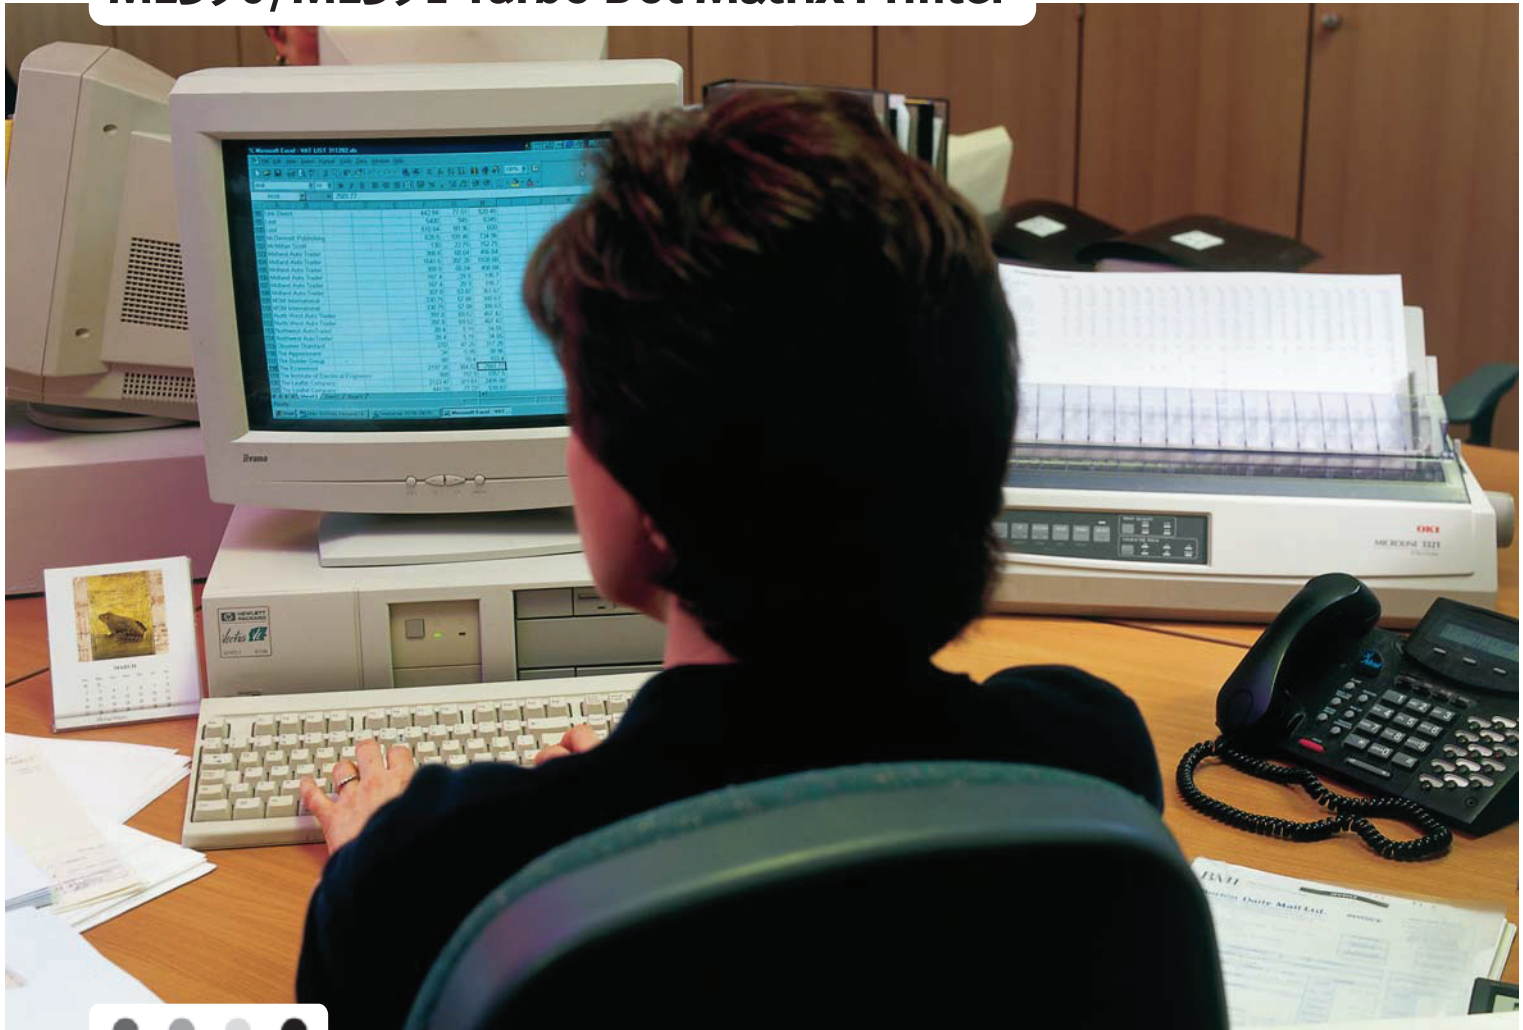

- ML390 TURBO
- ML391 TURBO
- 24-PIN DOT MATRIX PRINTER

## VERSATILE FORMS PRINTER WITH 24 PIN PRINT HEAD FOR IMPROVED PRINT QUALITY

The Microline 390/391 Turbo narrow and wide carriage printer is designed for users who require excellent quality and flexibility from a single printer. The Microline 390/391 Turbo is ideal for volume applications requiring high throughput and flexible changing between various print media. High reliability, ease of use and various in-built barcodes makes this printer the ideal tool for industrial, commercial, service, small business and office environments.

- Rugged OKI design
- High quality 24 pin printhead with OKI reliability
- Fast 390 characters per second print speed
- Multi-part paper handling (original + 4 copies)
- Parallel & USB interfaces, Network & serial card options



# OKI

# ML390/ML391 Turbo Dot Matrix Printer

## PRODUCT SPECIFICATION

		ML390	ML391
<b>General</b>	Number of pins	24	
	No. of multi-part forms	5 (one original + 4 copies) <small>(Carbon-lines paper &amp; Pressure-sensitive-paper with Bottom feed)</small>	
<b>Speed &amp; throughput</b>	Utility (12cpi)	312cps	
	Utility (10cpi)	260cps	
	Letter quality (12cpi)	104cps	
	Letter quality (10cpi)	87cps	
	Fastest print speed	390cps	
<b>Font &amp; print features</b>	Carriage width (10cpi)	80 columns	136 columns
	Max. in compressed mode	160 columns	272 columns
	Character pitch	10/12/15/17/20 pitch & proportional	
	Graphics resolution	Up to 360 x 360 dpi	
	Resident typefaces	Courier, Roman, Swiss, Swiss Bold, Orator, Prestige, Gothic, Utility + Barcodes	
	Font styles	Italics, Scalable	
<b>Emulations &amp; interfaces</b>	Printer emulations	Epson LQ Esc/P2, IBM Proprinter X24/XL24	
	Standard interfaces	Centronics Parallel + USB	
	Optional interfaces	Serial RS 232C/Ethernet	
<b>Paper-handling</b>	Continuous paper	76.2 - 254mm 3-10"	76.2 - 406.4mm 3-16"
	First printable line (from top of page)	0.5mm	
	Standard	Rear push tractors, paper parking, low test-off, bottom feed, autoloader single sheet	
	Optional	Pull tractors, Push tractors, Dual bin cut- sheet feeder (ML390 only), Roll paper stand (ML390 only)	
<b>Physical</b>	Dimensions (HxWxD), Weight <small>(Without Platen knob, Acoustic cover and Paper separator)</small>	147 x 399 x 355 mm 5.8kg approx	147 x 550 x 350 mm 7.7kg approx
	Memory	128KB	
	Noise level	57dB(A)/52dB(A) (quiet mode)	
<b>Power</b>	Power requirements	230V AC (+6%, -14%) 240V AC (±10%)	
	Frequency	50/60Hz	
<b>Reliability</b>	Print head life	200 million characters	
	Ribbon life	2 million characters	
<b>Supplies life</b>	MTBF	10,000 hours	

### OKI DATA AUSTRALIA PTY. LTD.

Level 1, 67 Epping Road  
Macquarie Park, NSW 2113  
Australia  
T 1800 800 140  
[www.oki.com/au](http://www.oki.com/au)

### OKI DATA NEW ZEALAND

F2 3 Orbit Drive, Rosedale  
Auckland 0632  
New Zealand  
T 0800 654 669  
[www.oki.com/nz](http://www.oki.com/nz)